




■ Part # 8113910

■ Part # 8114910

■ Part # 8273910


SELECTION CHART

SAMMYS Vertical Mount

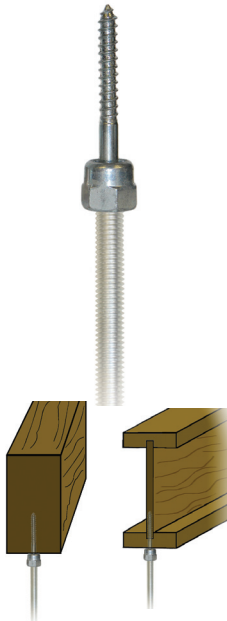

ROD SIZE	PART NUMBER	MODEL	DESCRIPTION	ULTIMATE PULLOUT (LBS)	UL LISTED	TEST LOAD (LBS)	FM APPROVED	TEST LOAD (LBS)	BOX QTY	CASE QTY	NUT DRIVER
1/4"	8002957	GST 100	1/4 x 1"	210 (7/16" OSB) 670 (3/4" Ply)					25	125	Part # 8113910
1/4"	8003957	GST 200	1/4 x 2"	1760 (Fir)					25	125	
1/4"	8004957	GST 300	1/4 x 3"	2060 (Fir)					25	125	
3/8"	8007957	GST 10	1/4 x 1"	210 (7/16" OSB) 670 (3/4" Ply)		300			25	125	
3/8"	8008957	GST 20	1/4 x 2"	1760 (Fir)		850		1475	25	125	
3/8"	8068925	GST 20-SS	1/4 x 2"	1760 (Fir)		850			25	125	
3/8"	8009925	GST 25-380	3/8 x 2-1/2"	2113 (Fir)		1500			25	125	
3/8"	8010957	GST 30	1/4 x 3"	2060 (Fir)		1500		1475	25	125	
3/8"	8069925	GST 30-SS	1/4 x 3"	2060 (Fir)					25	125	
3/8"	8011925	GST 40	1/4 x 4"	2180 (Fir)					25	125	
1/2"	8013925	GST 2	1/4 x 2"	1760 (Fir)					25	125	Part # 8114910
1/2"	8014925	GST 2.5-380	3/8 x 2-1/2"	2113 (Fir)					25	125	
1/2"	8015925	GST 3	1/4 x 3"	2275 (Fir)					25	125	


SAMMYS Swivel Head®



ROD SIZE	PART NUMBER	MODEL	DESCRIPTION	ULTIMATE PULLOUT (LBS)	UL LISTED	TEST LOAD (LBS)	FM APPROVED	TEST LOAD (LBS)	MIN THICKNESS	BOX QTY	CASE QTY	NUT DRIVER
3/8"	8139957	SH-GST 20	1/4 x 2"	1257 (Fir)		1050		1475	25	125	125	Part # 8113910
3/8"	8141957	SH-GST 30	1/4 x 3"	1720 (Fir)		1500		1475	25	125		
3/8"*	8269957	SH-GST/CST 20	5/16 x 1-3/4"	1903 Dim. Lumber 1406 @ 45° off vertical Dim. Lumber		1500 850 @ 45°			25	125		Part # 8273910
1/2"	8303957	SH-GST/CST 2.0	5/16 x 1-3/4"	1903 Dim. Lumber 1406 @ 45° off vertical Dim. Lumber					25	125		

* May require pre-drilling; consult joist manufacturer.

SAMMYS Horizontal Mount

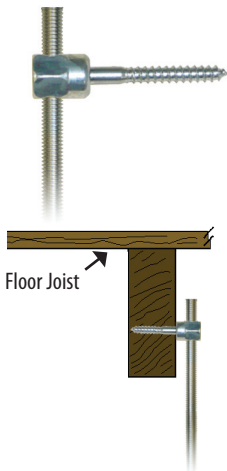

ROD SIZE	PART NUMBER	MODEL	DESCRIPTION	ULTIMATE PULLOUT (LBS)	UL LISTED	TEST LOAD (LBS)	BOX QTY	CASE QTY	NUT DRIVER
3/8"	8020957	SWG 10	1/4 x 1"	622 (Fir)		300	25	125	Part # 8114910
3/8"	8021957	SWG 20	1/4 x 2"	1725 (Fir)		1050	25	125	
3/8"	8073925	SWG 20-SS	1/4 x 2"	1725 (Fir)		850	25	125	
3/8"	8022925	SWG 25-380	3/8 x 2-1/2"	2249 (Fir)		1500	25	125	

SPECIAL NUT DRIVER SYSTEM: The nut drivers were designed with a unique spin-off feature which provides a fast and safe installation each time. When the face of the driver comes into contact with the material you are installing into, continue drilling until nut driver spins free. Installation is then complete. Warranty requires the use of the appropriate nut driver for installations.