

# E-Z Drywall Anchors

*The Original!  
Fast and Easy  
Self-Drilling  
Anchors*



## DESCRIPTION/SUGGESTED SPECIFICATIONS

### Drywall Anchor Applications—



**E-Z Anchor  
Self-Drilling  
Anchor**

The E-Z Anchor is a one-piece self-drilling anchor designed for optimal holding performance in gypsum wallboard. Available in zinc or high strength engineered plastic (non-conductive). Ideal anchor for 3/8", 1/2" and 5/8" gypsum wallboard.

## ADVANTAGES

- No hole preparation necessary; pre-drills own small precise hole in gypsum wallboard.
- Replaces plastic plugs and toggles.
- Deep thread design provides strong engagement in 3/8" 1/2" and 5/8" gypsum wallboard.
- Installs quickly and easily with a phillips screw-driver or square drive bit.
- Full range of anchors to cover all wall fastening applications.
- Available in corrosion resistant, non-conductive white nylon.
- Can be easily backed-out.
- Low profile head.
- Single point designs for clean cutting installation.

### E-Z Anchors



**E-Z  
Mini**

**Mini  
Twist-N-Lock**

**E-Z  
Anchor**

**E-Z  
Twist-N-Lock**

**E-Z  
Toggle**

# E-Z Drywall Anchors

## APPLICATIONS

|                       |                          |                              |
|-----------------------|--------------------------|------------------------------|
| Electrical Fixtures   | Plaques and Awards       | Smoke Detectors              |
| Thermostats           | Closet Organizers        | Clocks                       |
| HVAC Fixtures         | Coat Racks               | Kitchen Accessories          |
| Plumbing Fixtures     | Curtain Rods             | Doorbells                    |
| Bathroom Accessories  | Signs                    | Telecommunications Equipment |
| Shelving and Supports | Bulletin Boards          | Chalk Boards                 |
| Mirrors               | Control Systems          | Remote Control Boxes         |
| Picture Frames        | Decorative Wall Hangings |                              |
| Brackets              | Office Material Holders  |                              |

## SPECIFICATIONS

|                          |                                      |
|--------------------------|--------------------------------------|
| <b>Material</b>          | Zinc die cast, Carbon, Steel, Nylon  |
| <b>Drilling Capacity</b> | 3/8", 1/2" and 5/8" gypsum wallboard |

## PERFORMANCE TABLE

### E-Z Anchors

| DRYWALL THICKNESS             | HOLDING WEIGHT (lbs.)<br>Gypsum Board Thickness |      |      |
|-------------------------------|---|------|------|
|                               | 3/8"  | 1/2" | 5/8" |
| EZ Mini and Mini Twist-N-Lock | 30  | 40   | 50   |
| E-Z Anchor                    | 40  | 50   | 75   |
| Twist-N-Lock                  | 65  | 75   | 80   |
| E-Z Toggle                    | 70  | 85   | 150  |

These performance values are averages obtained under laboratory conditions. Note that these values will change depending on age, moisture content and surface treatment of the drywall (gypsum) material. Appropriate safety factors should be applied to these values for design purposes.

## SELECTION CHART


### E-Z Anchors

| PART NUMBER WITH SCREWS | PART NUMBER WITHOUT SCREWS | DESCRIPTION       | MATERIAL | MAXIMUM FIXTURE THICKNESS | ACCOMMODATES SHEETS METAL SCREW SIZE | BOX QTY | CASE QTY | BULK QTY |
|-------------------------|----------------------------|-------------------|----------|---------------------------|--------------------------------------|---------|----------|----------|
| 6411L                   | 6400L <sup>B</sup>         | Mini Twist-N-Lock | Nylon    | 3/4"                      | #6                                   | 100     | 1000     | 10,000   |
| 6411M                   | 6400M <sup>B</sup>         | E-Z Mini          | Zinc     | 3/4"                      | #6, #7, #8                           | 100     | 1000     | 3,000    |
| 6411                    | 6400 <sup>B</sup>          | E-Z Ancor         | Zinc     | 3/4"                      | #6, #7, #8                           | 100     | 1000     | 1,700    |
| 6411P                   | 6400P <sup>B</sup>         | E-Z Twist N Lock  | Nylon    | 3/4"                      | #8                                   | 100     | 1000     | 4,500    |
| 6401                    | -                          | E-Z Toggle        | Zinc     | 1/2"                      | #8                                   | 100     | 1000     |          |

<sup>B</sup> Available in Bulk Pack Qty


## INSTALLATION INSTRUCTIONS

### LIGHT DUTY & MEDIUM DUTY E-Z ANCORS



1. Place #2 Phillips screwdriver into recess of E-Z Zinc, E-Z Lite, E-Z Mini, E-Z Stud Solver, Twist-N-Lock, or E-Z Plastic Plus.
2. Press into drywall while turning the anchor clockwise until it is seated flush with wall.
3. Place fixture in position over installed E-Z Zinc, E-Z Lite, E-Z Mini, E-Z Stud Solver, Twist-N-Lock, or Plastic Plus. Insert screw with screw driver. Tighten fixture in place.

### HEAVY DUTY E-Z TOGGLE

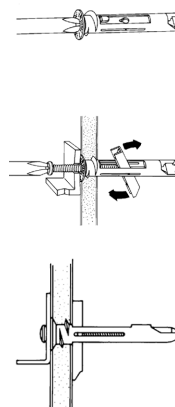

1. Using a #2 Phillips screwdriver, drill the E-Z Toggle Anchor into drywall until the head of the anchor is seated flush.
2. To "set" the clamp behind the drywall, place the mounting screw into the anchor and push or tap firmly until approximately 1" of screw is protruding (do not rotate). Then remove the screw.
3. Place fixture over E-Z Toggle, insert screw and continue to turn until fastened tightly (for example when attaching a 1/2" thick fixture, it will require approx. 23 full rotations of the screwdriver to fully tighten the fixture).

